




## eBox 2300

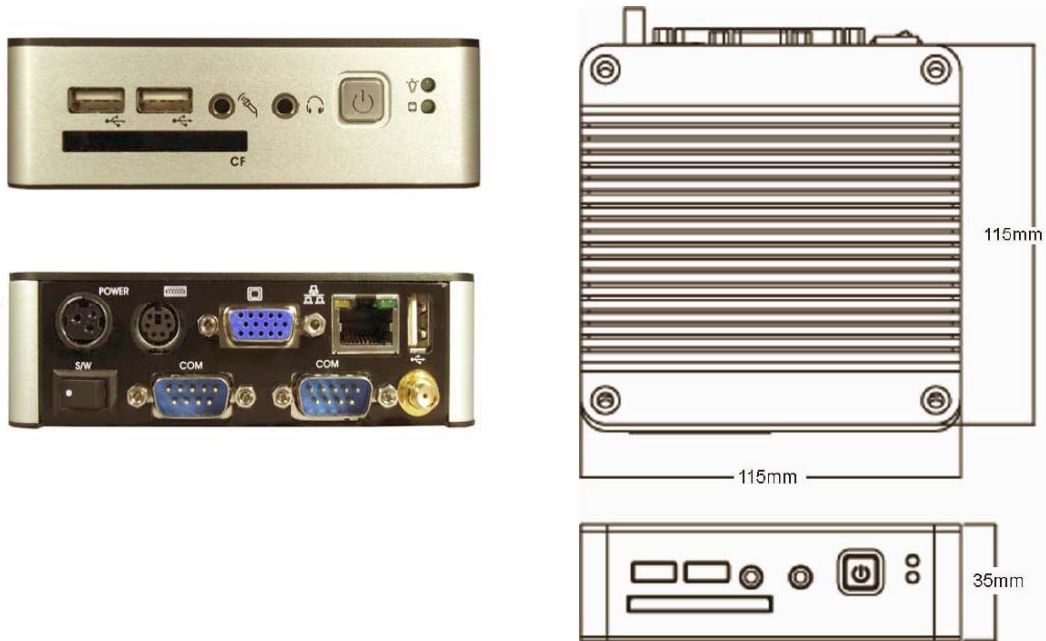

<b>MODEL NO</b>	eBox-2300
<b>CPU</b>	Vortex86-166Mhz (SoC: System-on-Chip) <b>(FANLESS)</b>
<b>BIOS</b>	AMI BIOS
<b>RTC</b>	Real Time Clock with lithium battery Backup
<b>Memory</b>	128 MB SDRAM onboard
<b>VGA</b>	Shared System Memory Area 8 MB External 15-pin D-type female VGA connector
<b>Ethernet Interface</b>	Realtek 8100B single chip x 1 Throughput: 10/100 Mbps
<b>I/O</b>	Enhanced IDE interface, 44pin box header x 1 Type I/II Compact Flash Slot x 1 Mini PCI Socket x 1 (Optional) RS-232 Port x 2 (Optional) USB Port x 3 (2 in the front) RJ-45 Ethernet Connector External 6-pin Mini DIN for PS2 Keyboard External 6-pin Mini DIN for PS2 Mouse
<b>Audio</b>	AC97 CODEC, Fully Compliant with AC97 V2.1 Phone Jack for MIC-in and Line-Out
<b>Power Requirement &amp; Management</b>	Power Push Button x 1 Single Voltage +5V @3A, w/ ACPI function Support
<b>Dimensions</b>	115 x 115 x 35 mm
<b>Weight</b>	505g
<b>Operating Temperature</b>	0 ~ +60°C operating temperature
<b>Certification</b>	CE, FCC