ZONING DESIGN FOR HAND-WRITTEN NUMERAL RECOGNITION

V.DI LECCE¹, G.DIMAURO², A.GUERRIERO¹, S.IMPEDOVO², G.PIRLO², A.SALZO²

 Dipartimento di Ing. Elettronica - Politecnico di Bari Via Re David - 70126 Bari - Italy
 Dipartimento di Informatica - Università di Bari Via Orabona, 4 - 70126 Bari – Italy

In the field of Optical Character Recognition (OCR), *zoning* is used to extract topological information from patterns. In this paper *zoning* is considered as the result of an optimisation problem and a new technique is presented for automatic *zoning*. More precisely, local analysis of feature distribution based on Shannon's entropy estimation is performed to determine "core" zones of patterns. An iterative region-growing procedure is applied on the "core" zones to determine the final *zoning*.

1 Introduction

Notwithstanding hundreds of good recognition algorithms have been proposed so far, machines are still far from achieve the performance of human beings in context-free hand-written character recognition, since different writing styles and changeable writing conditions make hand-written characters extremely variable [1].

In order to improve the recognition capability of reading machines, many efforts have been devoted to the analysis of local characteristics in hand-written characters [2,3,4,]. A simple way to obtain local information is through *zoning* [5]. A *zoning* is a partition of the *control box* of the pattern (i.e. the smallest rectangle containing the pattern); the elements of such partition are used to identify the position in which features of the pattern are detected. In other word, a handwritten characters are first normalized and included into a *control box*, successively, according to the zones of the *control box*, each feature is labeled with the name of the zone in which it has been detected. So far, the *zoning* design, that is the way in which the partition of the *control box* is defined, was carried out exclusively on the basis of intuitive motivations or personal experiences on the domain of application. In some cases the *control box* is divided into zones of equal size [5,6,7,8,9]: in other cases the *control box* is nonuniformly divided according to pattern density [10,11].

In this paper a new technique for *zoning* design is presented. The technique first determines the statistical distributions of local features using the set of training patterns. Successively the Shannon's entropy is used to determine "core" zones of the *control-box* showing high-discrimination capability. An iterative zone-growing process is used to design the final *zoning*.


583

In: L.R.B. Schomaker and L.G. Vuurpijl (Eds.), Proceedings of the Seventh International Workshop on Frontiers in Handwriting Recognition, September 11-13 2000, Amsterdam, ISBN 90-76942-01-3, Nijmegen: International Unipen Foundation, pp 583-588

2 Notation

In this paper the following definitions are used:

- $X = \{x_1, x_2, ..., x_N\}$: set of patterns;
- F={f₁,...,f_n} : set of features;
- C={ C₁,..., C_m} : set of pattern classes;
- B:control-box of a pattern, i.e. smallest rectangular image including the pattern;
- b_j : a pixel of the control-box, i.e. $b_j \in B$;
- I(b_i) : set of neighbour pixels of b_i (see Figure. 1a);
- z_i: a sub-image of the control box, i.e. z_i connected component, i=1,2,...,M;
- $I(z_i)$: set of neighbour pixels of z_i (see Figure. 1b);
- z_i^* : extended zone of z_i , i.e. $z_i^* = z_i \cup \{b_j\}$, being $b_j \in I(z_i)$ (see Figure. 1c);
- $Z=\{z_1, z_2, ..., z_M\}$: zoning of a control box B, i.e. Z is a partition of B;

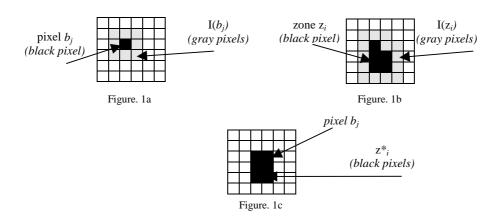

3 Shannon's entropy for pattern discrimination.

Shannon's entropy has been widely used in Pattern Recognition for decision tree construction, image thresholding and segmentation [12,13,14,15]. Shannon's entropy is defined as [16]:

$$H(P) = \sum_{k=1}^{m} p_k \log_2 \frac{1}{p_k}$$
(1)

where $P = (p_1, p_2, ..., p_m)$ is a probability distribution.

Now, if each element p_k of the vector P represents the probability that feature f_i is detected in the image zone z_j for the patterns belonging to C_k , k=1,2,...,m, the

584

Shannon's entropy can also be used to estimate the discrimination capability of each zone z_i . In fact, it is easy to verify that:

• min
$$H(P)$$
 if $\exists \underline{k}=1,2,...,m \not\ni' \begin{cases} p_{\underline{k}} = 1\\ p_{k} = 0 \quad k \neq \underline{k} \end{cases}$

• max H(P) if $\forall k=1,2,...,m: p_k = \frac{1}{m}$.

For instance, let be $P = \{p_1, p_2\}$, the behaviour of the Shannon's entropy is provided in Figure. 2 $(p_1=1-p_2)$.




Figure 2: Shannon's entropy

Figure 2 shows as the Shannon's entropy can be used to estimate the discrimination capability of a zone: if the presence of feature f_i in the image zone z_j is equally probable for patterns belonging to C_1 and C_2 , it results $P=\{0.5,0.5\}$ and therefore H(P)=1 (eq. 1); if the presence of feature f_i in the image zone z_j occurs exclusively for patterns belonging to C_1 , in this case $P=\{1,0\}$ and H(P)=0 (eq. 1); similarly, if the presence of feature f_i in the image zone z_j occurs exclusively for c₂, it results $P=\{0,1\}$ and H(P)=0 (eq. 1).

4 The Zoning Design Problem

In this paper, the *zoning* $\overline{Z} = \{\overline{Z_1}, \overline{Z_2}, ..., \overline{Z_M}\}$ is derived by the following optimisation problem in which the Shannon's entropy $H(P^{z_j})$ is used to evaluate the discrimination capability of zone z_j when feature f_i is considered:

$$\overline{Z} = \min_{Z} \sum_{j=1}^{M} H(P^{Z_j})$$
⁽²⁾

where $P^{z_j} = (p_1^{z_j}, p_2^{z_j}, ..., p_m^{z_j})$ is the probability distribution of the features f_i in z_j , for patterns belonging to the classes $C_1, C_2, ..., C_m$. The probability distribution $P^{z_j} = (p_1^{z_j}, p_2^{z_j}, ..., p_m^{z_j})$ is computed by using the formula:

$$\forall k = 1, 2, ..., m \quad p_k^{z_j} = \frac{F_{C_k}(z_j)}{\sum_{k=1}^m F_{C_k}(z_j)}, \text{if } \sum_{k=1}^m F_{C_k}(z_j) \rangle 0; \quad p_k^{z_j} = 0, otherwise.$$

where $F_{C_k}(z_j) = X_{C_k}(z_j) / N_{C_k}$, and

- ➤ $X_{C_k}(z_j) = \text{card} \{t \in X \mid t \text{ belongs to } C_k, \text{ and } f_i \text{ has been detected in t at zone } z_j \};$
- > N_{C_k} = card {t∈ X | t belongs to C_k }.

5 A Technique for Zoning Design

The technique for *zoning* design, based on eq. (2), is described in the following: (*Preliminary Phase*)

• For each one-pixel zone z_j of the pattern image compute: $P^{z_j} = (p_1^{z_j}, p_2^{z_j}, ..., p_m^{z_j})$ (*Phase 1: <u>Core" zone Definition</u>*)

- Detect the M "core" one-pixel zones of the image $z_1 = \{b_1\}, z_2 = \{b_2\}, ..., z_j = \{b_j\}, ..., z_M = \{b_M\}$ with the best discrimination capability (the points b_i are local minima for function H).
- (Phase 2: <u>Iterative zone-growing procedure)</u>)
- Repeat until the set of zones {z₁,z₂,..., z_j,...,z_M} becomes a partition of the pattern image:
- ⇒ For each z_j , j=1,2,...,M, select $z_j^*_{min}$ so that: $H(P^{z_j^*}_{min})=\min\{H(P^{z_j^*}) | z_j^*$ is an extended zone of $z_i\}$

 $\Rightarrow \text{ Select the zone } z_t \stackrel{*}{\underset{\min}{\text{ min}}} \text{ so that: } H(P^{z_t} \stackrel{*}{\underset{\min}{\text{ min}}}) = \min \{ H(P^{z_j} \stackrel{*}{\underset{\min}{\text{ min}}}) | j = 1, 2, \dots, M \}.$

This zone-growing process continues until the set of zones becomes a *zoning*, i.e. the set of zones becomes a partition of the control-box.

6 Experimental Results

The new technique for zoning design has been applied to handwritten numeral recognition. For this purpose we consider the classes $C = \{C_1 = 0', ..., C_{10} = 9'\}$, and the set of features $F = \{f_1, ..., f_9\}$ [17,18]: f_1 : *vertical-down* cavity; f_2 : *vertical-up* cavity; f_3 : *horizontal-right* cavity; f_4 : *horizontal-left* cavity; f_5 : *vertical-down* end-point; f_6 : *vertical-up* end-point; f_7 : *horizontal-right* end-point; f_8 : *horizontal-left* end-point; f_9 : hole. The pattern set X used for zoning design consists of the 18468 hand-written numerals extracted from the "BR" directory of the CEDAR database [19].

The new technique for *zoning* design has been evaluated with respect to a traditional *zoning* based on a 4x4 grid. Numeral recognition has been performed by an holograph-based technique [20]. Table 1 reports the results when a 4x4 grid is used (a), and when the new technique is adopted (b). The set of 2671 hand-written numerals from the CEDAR database has been used for the test [19].

586

This result demonstrates the effectiveness of the new technique even if the recognition rate is not satisfactory for some classes. In fact, several zones provide information useful for the classification of patterns belonging to a restricted subset of classes, while no zone provides information useful for the other classes. In this sense other optimality functions must be considered able to select zones with high-discrimination capability and with complementary behaviour.

Pattern Class	Number of	Recognition rate	
	Testing Patterns	Zoning (a)	Zoning (b)
0	355	68%	77%
1	288	85%	93%
2	220	88%	93%
3	206	84%	96%
4	179	77%	88%
5	116	56%	83%
6	243	65%	87%
7	217	63%	76%
8	189	60%	75%
9	176	65%	76%

Table 1: Experimental Results

7 Conclusion

In this paper a new technique for the *zoning* design is presented. Topological distribution of features is used to detect zones of the pattern image with high discrimination capabilities. The experimental results, carried out in the field of handwritten digit recognition, point out the effectiveness of the new approach and make clear promising research directions.

References

- 1. C.Y. Suen, M. Bertold, S. Mori, "Computer recognition of Hand-printed Characters: The State of the Art", Proc. of IEEE, 68 (4), pp. 469-483, 1980.
- C. Nadal, C.Y.Suen, "Applying human knowledge to improve machine recognition of confusing handwritten numerals", Pattern Recognition, vol. 26, n. 3, pp. 381-389, 1993.
- G. Dimauro, S. Impedovo, G. Pirlo, "Uncertainty in the recognition process, some consideration on human variable behaviour", in From Pixels to Features III: Frontiers in Handwriting Recognition, S. Impedovo and J.C. Simon (eds.), Elsevier Science Publ., 1992, 215-221.
- C.Y.Suen, J. Guo, Z.C. Li, "Computer and Human recognition of Hand-printed Characters by Parts", From Pixels to Features III: Frontiers in Handwriting Recognition, S.Impedovo and J.C.Simon (eds.), Elsevier Publ., 1992, pp. 223-236.

- G.Baptista, K.M.Kulkarni, "A high accuracy algorithm for recognition of handwritten numerals", Pattern Recognition 4, pp.287-291, 1988.
- 6. B. Hussain and M. R. Kabuka, "A Novel Feature Recognition NN and its Application to Character Recognition", IEEE PAMI, vol.16, n.1, pp.98-106, 1994.
- R. Fukuda, S. I, F. Tamari, X. Ming, M. Suzuki, "A technique of Mathematical Expression Structure Analysis for the Handwriting Input System", Proc. ICDAR'99, IEEE Computer Society Press, 1999, pp. 131-134.
- H. Tanaka, K. Nakajima, K. Ishigaki, K. Akiyama, M. Nakagawa, "Hybrid Pen-Input Character Recognition System based on Integration of Online-Offline Recognition", Proc. ICDAR'99, IEEE Comp.Soc., 1999, pp. 209-212.
- 9. P. Ahmed and C. Y. Suen, "Computer Recognition of Totally Uncostrained Handwritten Zip Codes", IJPRAI, vol. 1, no. 1, pp. 1-15, 1987.
- T. Kameshiro, T. Hirano, Y. Okada, F. Yoda, "A Document Retrieval Method Tolerating Recognition and Segmentation Errors of OCR Using Shape-Feature and Multiple Candidates", Proc. ICDAR'99, IEEE Comp. Soc., 1999, pp. 681-684.
- M. Yen Cen, A. Kundu and J. Zhou, "Off-Line Hand-written Word Recognition Using a Hidden Markov Model Type Stochastic Network ", IEEE T-PAMI, vol. 16, no. 5, pp. 481-496, May 1994.
- S. Rasoul Safavian, D. Landgrebe, "A Survey of Decision Tree Classifier Methodology", IEEE T-SMC, Vol. 21, N. 3, 1991, pp. 660-674.
- 13. C.Y.Suen and Q,R, Wang, "ISOETRP An interactive clustering algorithm with new objectives", Pattern Recognition, vol. 17, pp. 142-147, 1977.
- 14. C.Chang,K.Chen,J.Wang,M.L.G.Althouse,"A relative entropy-based approach to image tresholding", Pattern Recognition,vol.27,n.9,1994,pp. 1275-1289.
- M.L.G. Althouse, C.-I. Chang, "Target detection in multispectral imagery using spectral co-occurrence matrix and entropy thresholding", Optical Engineering, vol. 34, 1995, pp. 2135-2148.
- 16. J.Aczel and J. Daroczy, "On Measures of Information and Their Characterisations", New York, Academic Press., 1975.
- 17. G. Dimauro, S. Impedovo, G. Pirlo, A. Salzo, "A Multi-expert system for handwritten digit recognition", in Progress in Handwriting Recognition, S. Impedovo (ed.), World Scientific, 1997, pp. 363-367.
- G. Dimauro, S. Impedovo, G. Pirlo, A. Salzo, "Zoning Design for Handwritten Numeral Recognition", Lecture Notes in Computer Science 1311, A. Del Bimbo (ed.), Springer, Berlin, 1997, pp. 592-599.
- 19. R.K. Fenrich, J.J. Hull, "Concerns in creation of image databases", Proceedings IWFHR-III, Buffalo, New York, May 25-27, 1993, 112-121.
- N.D. Gorsky, "Off-line Recognition of Bad Quality handwritten Words Using Prototipes", in Fundamentals in Handwriting Recognition, S. Impedovo (ed.), Springer verlag, 1994, pp. 199-217.

588